

Inline diaphragm seal per DIN 11851, IDF and Clamp Type series DF....



Application area

- Food industry
- Pharmaceutical industry
- Biotechnology

Features

- Circular diaphragm of stainless steel, slightly grooved, laser welded
- Volume optimised diaphragm base
- Dead-zone free design
- EHEDG-certified
- System fillings for different applications
- Measuring device connection:
 - directly welded
 - directly screwed
 - with temperature decoupler
 - with capillary

Options

- Labom REconnect quick coupling device for easy and safe separation and connection of diaphragm seal systems. Available with a wide range of pressure gauges and pressure transmitters; Type series MK1000, see data sheet D6-022
- Certificates
 - Material certificate acc. to EN 10204-3.1
- Electropolishing (wetted parts)
- Hygienic design with advanced surface quality
- Special materials upon request

Application

Suitable for mounting to bourdon tube pressure gauges and pressure transmitters. The inline diaphragm seal with aseptic design is used mainly for dead-zone free pressure measurement.

Technical data

Constructional design

Basic body:	Volume reduced diaphragm base Material: stainless steel mat.-no. 1.4404/1.4435 (316L)
Union nut:	Material: stainless steel mat.-no. 1.4301 (304)
Diaphragm:	Inline diaphragm
Material wet- ted parts:	Diaphragm: Stainless steel mat.-no. 1.4435 (316L) Further materials upon request Basic body: Stainless steel mat.-no. 1.4404/1.4435 (316L)

Process connection

Design:	<ul style="list-style-type: none">■ Sanitary connection per DIN 11851■ Clamp connection per ISO 2852 and DIN 32676■ IDF connection per ISO 2853
Nominal width/nominal pressure:	See table

Sealing are not included in the scope of delivery.

Measuring device connection

See order details.

Material stainless steel mat.-no. 1.4301 (304)

System filling

See order details; further upon request.

Further details about pressure transmission fluids see general technical information TA_038.

Hygienic design

The surface roughness of the wetted parts made of stainless steel are executed according to EHEDG Doc.8 and ASME BPE SF3.

In case of choosing the additional feature HY, we guarantee the following surface roughness values:

Diaphragm foil:	$Ra \leq 0.38 \mu m$
Laser welds:	$Ra \leq 0.76 \mu m$
Turned parts:	$Ra \leq 0.76 \mu m$

Further versions of hygienic design upon request.

Temperature error

In order to optimise the system we provide a detailed error calculation upon request.


Weight

See table.


Further information about diaphragm seals see general technical information TA_031.

Flame arrester MF21xx for connection of measuring devices to zone 0 see data sheet D6-025.

Measuring device connection

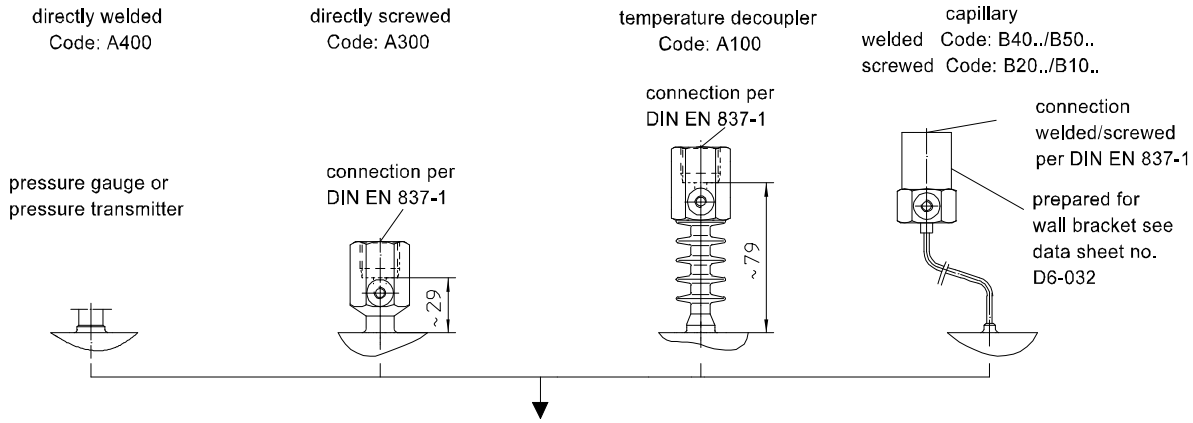

Dimensions

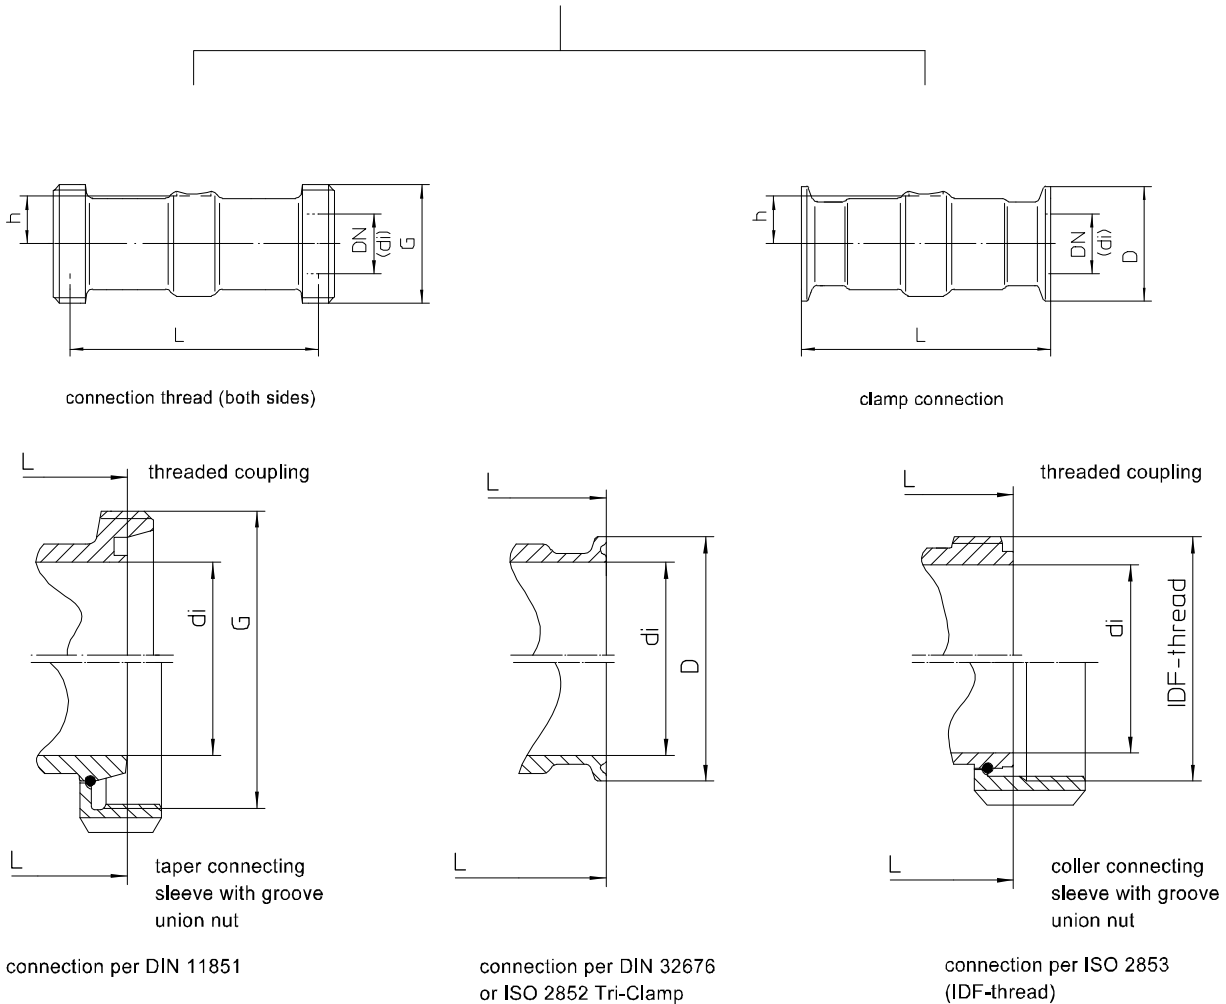

Inline diaphragm seals for pipes per EN 10357 (DIN 11850)

				sanitary connections				
				DIN 11851		DIN 32676		weight approx.
nominal- Ø	length *	inside- Ø	connection height	nominal pressure	connection round thread per DIN 11851	nominal pressure	clamp connec- tion per DIN 32676	
DN	L (mm)	di (mm)	h (mm)	PN	Gewinde (Rd)	PN	D (mm)	(kg)
10	96	10.0	27.5	40	28x1/8"	16	34.0	0.8
15	150	16.0	12.0	40	34x1/8"	16	34.0	0.9
25	110	26.0	21.0	40	52x1/6"	16	50.5	0.9
32	110	32.0	26.0	40	58x1/6"	16	50.5	1.3
40	110	38.0	28.5	40	65x1/6"	16	50.5	1.4
50	110	50.0	34.0	25	78x1/6"	16	64.0	1.7
65	110	66.0	42.0	25	95x1/6"	10	91.0	2.1
80	60	81.0	47.5	25	110x1/4"	10	106.0	1.2
100	60	100.0	60.0	25	130x1/4"	10	119.0	1.3

Inline diaphragm seals for pipes per BS 4825 Part 3 and O.D. Tube (suitable for pipes per ASME- BPE)

					sanitary connections				
					IDF per ISO 2853		clamp connection per ISO 2852		weight ap- prox.
nominal- Ø		length *	inside- Ø	connection height	nominal pressure	IDF thread per ISO 2853	nominal pressure	clamp con- nection per ISO 2852	
DN (Zoll)	(mm)	L (mm)	di (mm)	h (mm)	PN	IDF- thread (Tr)	PN	D (mm)	(kg)
1"	25.4	110	22,2	21.0	40	37x3.175	16	50.5	0.9
1 1/2"	38.0	110	34.8	28.5	40	50,5 x3.175	16	50.5	1.3
2"	51.0	110	47.8	34.0	25	64 x3.175	16	64.0	1.7
2 1/2"	63.5	110	60.3	38.0	25	77.5 x3.175	16	77.5	2.1
3"	76.1	60	72.9	44.5	25	91 x3.175	10	91.0	1.2
4"	101.6	60	97.6	59.5	25	118 x3.175	10	119.0	1.3

Pipe dimensions within pipe tolerance.

* Further lengths upon request.

Additional features (to be indicated in case of need, only)	
W1020	material certificate per EN 10204-3.1, wetted parts
W4035	elctropolishing of wetted parts

Order code (example): DF1140 - A4007 - L22 - ...

¹ EHEDG certified only in connection with hygienic design (order code option HY)

² EHEDG certificate valid only if gaskets are used that are listed in the "EHEDG position paper"

³ groove union nut on the right

⁴ for more detailed information about pressure transmission fluids see TA_038.

Please state temperature range to allow an accurate calculation of the system.

⁵ max. media temperature for pressures > 0 bar rel.