

Pressure transmitters for refrigerant gas, HFC-134a series EDN.337



All st. steel for wetted parts & housing
No welding parts between diaphragm & sensor housing
Only for refrigeration gas, HFC-134a
with Declaration of Conformity, CE

General features

- Piezoresistive silicon pressure sensors
- Pressure range from -1...0 bar to -1...50 bar
- Specially, designed for refrigerant gas HFC-134a
- No welding parts on diaphragm by laser machine, only for refrigerant gas HFC-134a, aggressive gas.
- All wetted parts are made of stainless steel, 316L.

Application area

- Specially, designed for refrigerant gas, HFC-134a.
- for all kinds of aggressive gases.
- only for refrigeration applications, heating applications
- in the field of simultaneous application of negative and positive pressure.

General specification

Pressure ranges

-1...0 bar to -1...+ 50 bar
0...1.6 bar to 0...40 bar

Accuracy

± 0.5% F.S
included Linearity+Hysteresis+Repeatability

Overpressure

1.3 X pressure range

Output type

Current (2-wire) : 4...20mA
Voltage (3-wire) : 0...10V, 0...5V, 1...5V

Power supply

Available power : DC 12...30V

Temperature range

Operating : -20...80 °C
 -40...+125 °C / option
Compensated : -10...70 °C

Thermal error

Zero thermal error : ±0.75%FS @ 35 °C (typ.)
Span thermal error : ±0.75%FS @ 35 °C (typ.)

Isolation : > 100MΩ at 100 VDC

Response time : ≤ 5ms



Pressure transmitter series EDN.337

Materials

Wetted parts : St. steel 316L
Sensor sealing : No O-ring
Body : St. steel 304

Electrical connection with weather protection

mPm plug : IP65
DIN 4650 A : IP65
M12 Plug : IP65
2m flying cable : IP65 [options] IP 67 & 68

Pressure connection

G 1/4" : DIN 3852-E with sealing
 by DIN 3869 ring seals
R 1/4" (PT 1/4")
NPT 1/4"

7/16-20 UNF male
7/16-20 UNF female

Weight : Approx. 120g

Option

Cooling device : High temperature adapter
 up to 200 °C / up to 300 °C



DAHO Tronic Limited
Tel: 02-865-7001 Fax: 02-865-7109
mail: info@daho.co.kr

STX W-Tower 209
Gyeongin-ro 53 Gil 90 Guro-gu
Seoul 08215 Korea

www.daho.co.kr

Technical data

Input pressure range

Normal pressure:

-1...0 bar up to -1...50 bar

0...1.6 bar to 0...40 bar

Permissible static pressure:

Piezoresistive silicon pressure sensors

Output signal / Supply

Current:

2-wire system 4...20mA $V_s=12...30$ VDC

Voltage:

3-wire system 0...10V $V_s=12...30$ VDC

0...5V

1...5V

0.5...4.5V

Performance

¹Accuracy: $\leq \pm 0.5\% \text{FSO} @ 25^\circ\text{C}$

¹ accuracy according to IEC 60770 - limit point adjustment
including non-linearity, hysteresis as well as repeatability

Permissible load / R_L

Current: 2-wire, $R_L \text{ max} = [(V_s - V_s \text{ min}) / 0.02 \text{A}] \Omega$

Voltage: 3-wire, $R_L \text{ min} = 10 \text{k}\Omega$

Influence effects:

Supply: 0.05%FSO/10V

Longterm stability: $\leq \pm 0.5\% \text{FS} / \text{year}$

Response time: <5ms

Thermal effects (Offset and Span)

/ Permissible temperatures

FS thermal error: $\pm 0.75\% \text{FS} @ 25^\circ\text{C}$, typical

Zero thermal error: $\pm 0.75\% \text{FS} @ 25^\circ\text{C}$, typical

Operating temperature: $-20...80^\circ\text{C}$

Compensated temperature: $0...70^\circ\text{C}$

Electrical protection

Electromagnetic compatibility:

Emission and immunity according to

EN 61326-2-3:20B CCISPR II Group 1, Class A

EN IEC 61000-3-2:2019

Insulation: the transmitter is grounded via
the process connection

Mechanical stability

Vibration: No change at 10 g RMS (20...2000) Hz

Shock: 0.1 g (1m/s) Max.

Materials

Pressure port: Stainless steel 316L

Housing / body: Stainless steel 304

Sensor diaphragm: Stainless steel 316L

Wetted parts: Stainless steel 316L

Miscellaneous

Current consumption

Signal output current max. 25mA

Current

4...20mA, 2-wire system

Signal output voltage max. 7mA

Voltage:

0...10V, 3-wire system

0...5V, 3-wire system

1...5V, 3-wire system

Ingress protection: IP65

EMC Test report for CE conformance

■ EN 61326-2-3:2013 / Class A

■ EN 61326-2-3: 2013 / IEC 61326-1:2012

Ordering Information

Model code EDN.337 · · · · · B · · · · ·

Output signal	
O1	4...20mA / 2-wire system
O2	0...10V / 3-wire system
O3	0...5V / 3-wire system
O4	1...5V / 3-wire system

Electrical connection	
P	mPm plug
C	2m flying cable
D	DIN 43650 A
M	M12 plug

Process connection	
G4	PF 1/4"
R4	PT 1/4"
U1	UNF 7/16"-20 male
U2	UNF 7/16"-20 female
RYY	Others on request

Pressure range code, unit bar

Code	Range
R01	-1...50 bar
R02	-1...35 bar
R05	-1...24 bar
R06	-1...20 bar
R07	-1...15 bar
R09	-1...9 bar
R11	-1...5 bar
R19	-1...0 bar
R33	0...10 bar
R35	0...16 bar
R37	0...25 bar
R39	0...40 bar
YYY	Others on request

Option code


Code	Description
CD2	Cooling device up to 200 °C
CD3	Cooling device up to 300 °C
TP	St. stell tag plate, 60 x 20 x 0.5t
DMCC	Manufacture calibration certificate
KC	KOLAS Ilac-MRA calibration certificate

How to Order


EDN.337.O1.C.U2.R02

EDN.337, accuracy $\pm 0.5\%$, 4...20mA, 7/16"-20 UNF(Female), 2m flying cable, -1...35 bar


Outline drawing





mPm plug type



DIN 43650 A Type




M12 Plug Type

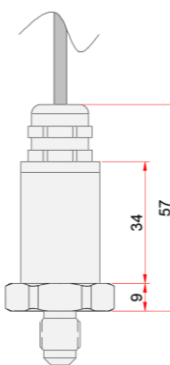


Cable Gland Type


Process connection




7/16"-20UNF / Female
SAE J513



7/16"-20UNF / male
SAE J513




G1/4" A
DIN EN ISO 1179-2




R1/4"
ISO 7

Pin assignment

DIN 43650A connector according to DIN EN 175301-803A



2-wire / current



3-wire / voltage


Pin No.	2-Wire	3-Wire
1	+Vcc	+Vcc
2	Output(mA)	GND
3		Output(VDC)




M12 x 1, 5-pin / male

Pin No.	2-Wire	3-Wire
1	+Vcc	+Vcc
2	Output(mA)	GND
3		Output(VDC)
4		


Flying leads with 2m cable



2-wire / current



3-wire / voltage



	2-Wire	3-Wire
White	Output(mA)	Output(VDC)
Red		+Vcc
Black	+Vcc	GND